




### Ograda Axis-SR

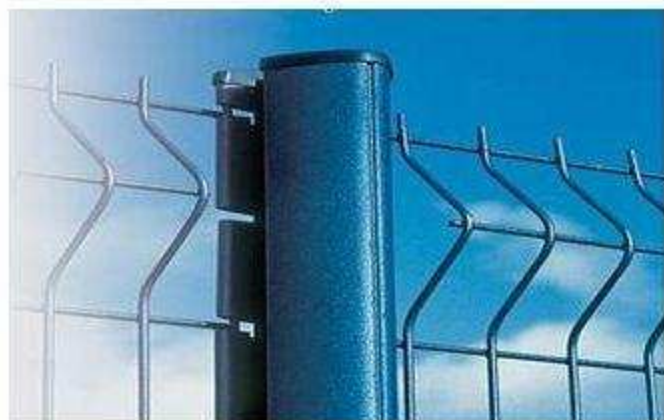


#### OGRADA AXIS SR

**PANEL** - AXIS-S širina panela 2480 mm , debljina horizontalne žice 6,0mm , debljina vertikalne žice, 5,0 mm + zaštita ZN + PVC  
 dimenzija okca 50/100mm

**STUB** - AXIS - 100/70 mm , tip Omega profil , debljina zida 2,2 mm.Osno rastojanje je 2,536

**STUB** - AXOR- 70/50 mm , tip Omega profil , debljina zida 2,0 mm.Osno rastojanje je 2,510

Predviđeno za ugradnju sa stubom Axis 100/50 mm

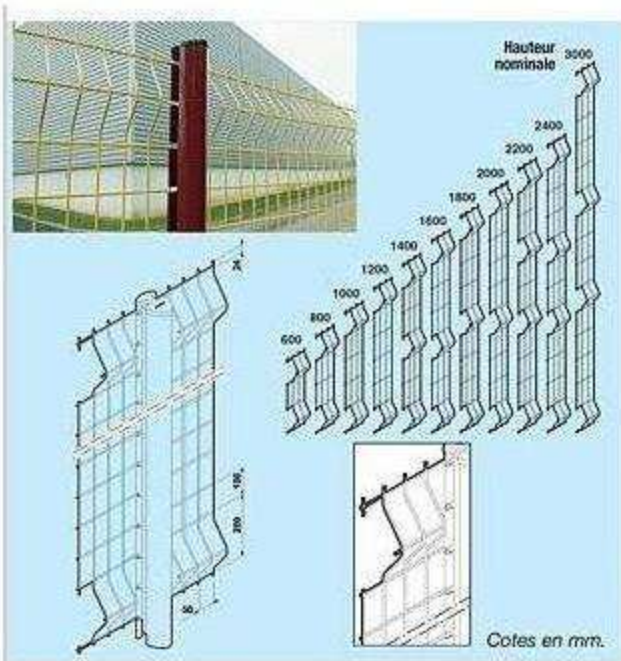

#### Axis® SR

Pour une résistance proche du panneau AXIS® D, l'AXIS® SR allie rigidité (maille de 100x50 mm et diamètre de fils horizontaux de 6 mm) et raffinement des lignes (panneau à plis).  
 Design unique sur le marché.



Ø Fil (mm)	Maille (mm)	Largeur panneau (m)	Hauteur nominale panneau (m)	Entraxe poteau à poteau (m)	Poteau associé
Horizontal : 6  Vertical : 5	100x50	2,480	0,60	2,536	Poteau AXIS® Design
			0,80		
			1,00		
			1,20		
			1,40		
			1,60		
			1,80		
			2,00		
			2,20		
			2,40		
		2,315	3,00	2,371	



stub Axis 100/50 mm

