

Ograde




Ograda Axis-D/DR



OGRADA AXIS D i AXIS DR

- PANEL - AXIS-D širina panela 2480 mm , debljina horizontalne žice 2 x 6,0mm , debljina vertikalne žice, 5,0 mm + zaštita ZN + PVC dimenzija okca 50/200mm
- AXIS -DR širina panela 2480 mm , debljina horizontalne žice 2 x 8,0mm , debljina vertikalne žice, 6,0 mm + zaštita ZN+PVC
- STUB - AXIS - 100/70 mm , tip Omega profil , deblina zida 2,2 mm.Osno rastojanje je 2,536

Predvidieno za ugradnju sa stubom Axis 100/50 mm

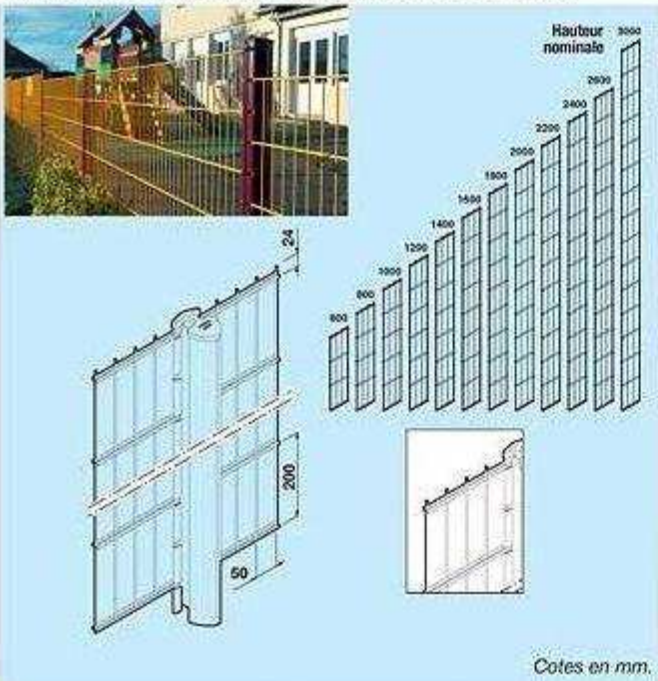

Axis® D

De même conception que AXIS® DR, AXIS® D protège les industries, les collectivités et administrations ainsi que les sites de sécurité. Les doubles fils horizontaux de diamètre 6 mm apportent plus de rigidité au panneau.



Ø Fil (mm)	Maille (mm)	Largeur panneau (m)	Hauteur nominale panneau (m)	Entraxe poteau à poteau (m)	Poteau associé
Horizontal : 2 x 6 Vertical : 5	200x50	2,480	0,60	2,536	Poteau AXIS® Design
			0,80		
			1,00		
			1,20		
			1,40		
			1,60		
			1,80		
			2,00		
			2,20		
			2,40		
		2,315	2,60	2,371	
			3,00		



stub Axis 100/50 mm

